

www.airpipeusa.com 602-362-PIPE (7473)

Rigid Aluminum Pipe



- Up to max. 8" (200mm) diameter.
- High-quality powder coating available in blue, green
- and gray. Additional colors can also be supplied. • Designed for compressed air, vacuum, and inert gases.
- Light-weight & corrosion-free.

Aluminum Pipe Connectors



- Quick-connect design. Superior reliability & longevity.
- Largest selection of fitting configurations. Modular & reusable.
- 100% recyclable & non-flammable materials.

Aluminum Quick Drop Fittings



- Quick installation to main ring.
- Can be used vertically or horizontally. Design does not allow water to enter downstream
- Configurations allow for multiple drop connection types. e.g., hose reels.

Ball & Butterfly Valves



- Quick connection. Available for NPT thread, flange, and quick connection types.
- High-flow design ensures optimal performance.

Flexible Hoses



- Suitable for compressor & equipment outlets to absorb vibration.
- Allows for expansion and contraction of the
- pipe system.
- Bypass obstacles. Resistant to mineral or synthetic lubricated oils.

Tools & Accessories





- Suitable for various pipe systems. Used for a variety of installation methods,
- e.g., wall, beam, roof, channel, rod, etc. Designed to work best with AIRpipe products.

AT LIMINITIM

PIPE – BLUE		
19 ft Length	DN	40
1000	3/4"	
2000	1"	
4000	1 1/2"	_
5000	2"	_
6000	2 1/2"	
7000	3"	
8000	4"	
9000	6"	
A000	8"	_

ALUMINUM PIPE – GREEN		
	(DN)	400
19 ft Length 1061	3/4"	
2061	1"	
4061	1 1/2"	_
5061	2"	
6061	2 1/2"	
7061	3"	
8061	4"	
9061	6"	
A 0.6.1	Q"	

ALUMINUM PIPE – GRAY		
19 ft Length	DN	000
1062	3/4"	-0
2062	1"	
4062	1 1/2"	
5062	2"	
6062	2 1/2"	
7062	3"	
8062	4"	
9062	6"	
A062	8"	

EQUAL 90° ELBOW		
	DN	
1003	3/4	
2003	1"	
4003	1 1/2"	
5003	2"	

5003	2"	_
6003	2 1/2"	
7003	3"	
8003	4"	
9003	6"	THE PERSON NAMED IN
A003	8"	

		1.00
	DN	13
1005	3/4	
2005	1"	
4005	1 1/2"	
5005	2"	
6005	2 1/2"	
7005	3"	- CAT
8005	4"	THE RESERVE OF THE PERSON OF T
9005	6"	
A005	8"	THE R. P. LEWIS CO., LANSING, MICH. LANSING, MICH.

EQUAL 45° ELBOW		
	DN	
1004	3/4	8
2004	1"	
4004	1 1/2"	
5004	2"	
6004	2 1/2"	
7004	3"	
8004	4"	
9004	6"	1
A004	8"	

A004	8"	
*Supplied with (2) union		
END CAP		
	DN	ab.
1006	3/4"	3 /
2006	1"	8/1
4006	1 1/2"	
5006	2"	
6006	2 1/2"	1

A006

*Supplied with union connector

PIPE-TO-PII CONNECTO			
	DN		
1002	3/4	"	
2002	1"		
1002	11	/2"	
5002	2"		
2002	2.4	/ 0.11	
5002 7003	2 1 3"	12	10-19/10
7002	3" 4"		
3002	6"		
9002	0 8"		
A002	<u> </u>		
REDUCING	TEE		0 V 8 W
	DN	DN	
2107	1"	3/4	18/18
4207	1 1/2"	1"	
5207	2"	1"	

MALE THREADED

3/4" 3/4"

1" 3/4"

1 1/2" 1"

1 1/2" 2"

2" 2"

2 1/2" 2"

2 1/2" 2 1/2" 3" 2 1/2"

1/2"

3/4"

1/2"

1 1/2"

1/2"

3/4"

1/2"

1 1/2"

1 1/2"

1 1/2"

1 1/2"

2"

1/2"

3/4"

1/2"

3/4"

1/2"

3/4" 1/2"

3/4" 1/2"

3/4"

1/2"

3/4"

3/4

3/4

1/2"

1/2"

3/4"

1/2"

1/2"

3/4"

1/2"

1/2"

1/2"

1 1/2" 1 1/4"

1 1/2" 1 1/2"

2" 1 1/2"

1/2"

ADAPTER

2017

2117

2217

4217

4317

4417

4517

5417

5517

6617

7617

7717

2015

2215

4415

5515

1113

2013

2213

4413

5513

9410

9510

A410

A510

5199

8199

A099 A199

2210

4110

4210

5110

5210

6110

6210

7110

7210

8110

8210

9110

9210

A210

6011

8011

QUICK DROP

STRAIGHT

QUICK DROP

FEMALE THREADED

STRAIGHT QUICK DROP

2 1/2"

2 1/2"

1 1/2"

1 1/2"

2 1/2"

2 1/2"

1 1/2"

1 1/2"

2 1/2"

2 1/2"

FEMALE THREADED

QUICK DROP

*Supplied with union connector

MALE ELBOW

FEMALE ELBOW

3/4"

3/4"

1 1/2"

3/4"

1 1/2"







REDUCI CONNEC	NG PIPE-TO CTOR	-PIPE	-6
	DN	DN	
2121	1"	3/4"	The state of the s
4221	1 1/2"	1"	
5221	2"	1"	
5421	2"	1 1/2"	
6421	2 1/2"	1 1/2"	
6521	2 1/2"	2"	
7521	3"	2"	
*Supplied with a	union connectors 3"	2 1/2"	400
		- 44-11	The state of the s
8621	4"	2 1/2"	The state of the s
8621 8721	4" 4"	3"	the party of
	<u>-</u>	Acres 1	
8721	4"	3"	

ADAPTER			
	DN	NPT	4
1019	3/4	1/2"	
1119	3/4	3/4"	
2019	1"	1/2"	
2219	1"	1"	
4419	1 1/2	" 1 1/2"	
5519	2"	2"	
6619	2 1/2	" 2 1/2"	
7719	3"	3"	

8284 3/8" Automotive Nipple to 3/8" Male NPT

4184 1/4" Industrial (ISO B) Nipple to 1/4" Male NPT

8184 3/8" Industrial (ISO B) Nipple to 3/8" Male NPT

Саррис	d with dilion connector
	- A B
	VERSAL QUICK UPLERS
1484	1/4" ISO 6150B/ Automotive Body to 1/2" Male NPT
3884	3/8" ISO 6150B/ Automotive Body to 1/2" Male NPT
4284	1/4" Automotive Nipple to 1/4" Male NPT



1 1/2" 47.24"

LENGTH (in)

2 1/2" 53.15"

3" 72.83"

4" 74.80"

2" 53.15"

4155

5155

6155


7155

8155

30° CONNECTION

*Supplied with (2) union connectors

BALL VALVE

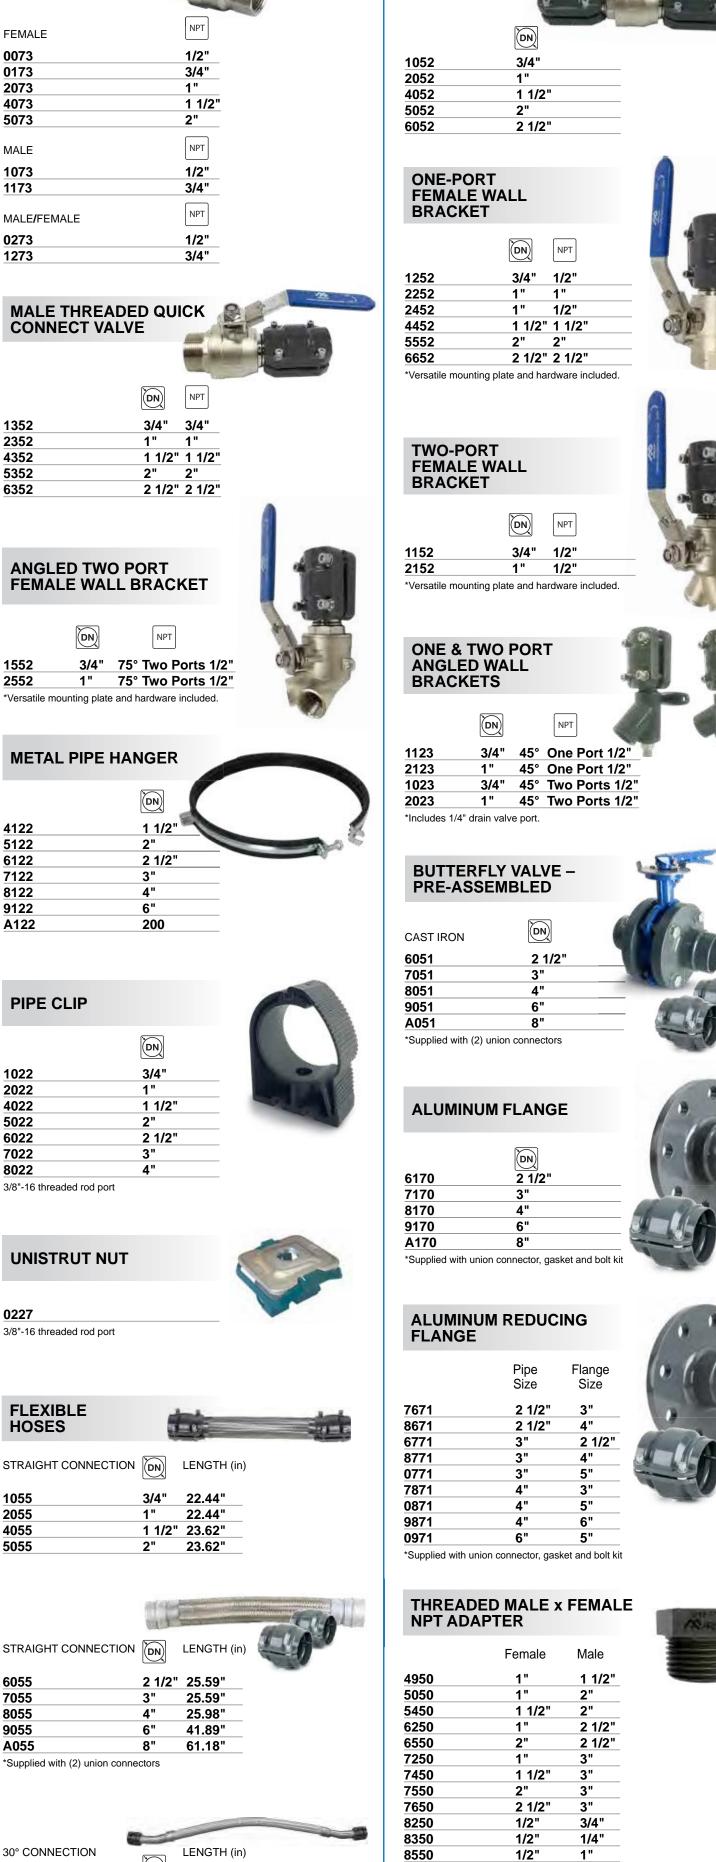



3/8"

1/2"

3/4"

1/2"

3/4"

1/4"

1/2"

1/2"


1 1/2" 1 1/2"

THREADED ADAPTER

2231

QUICK CONNECT

VALVE

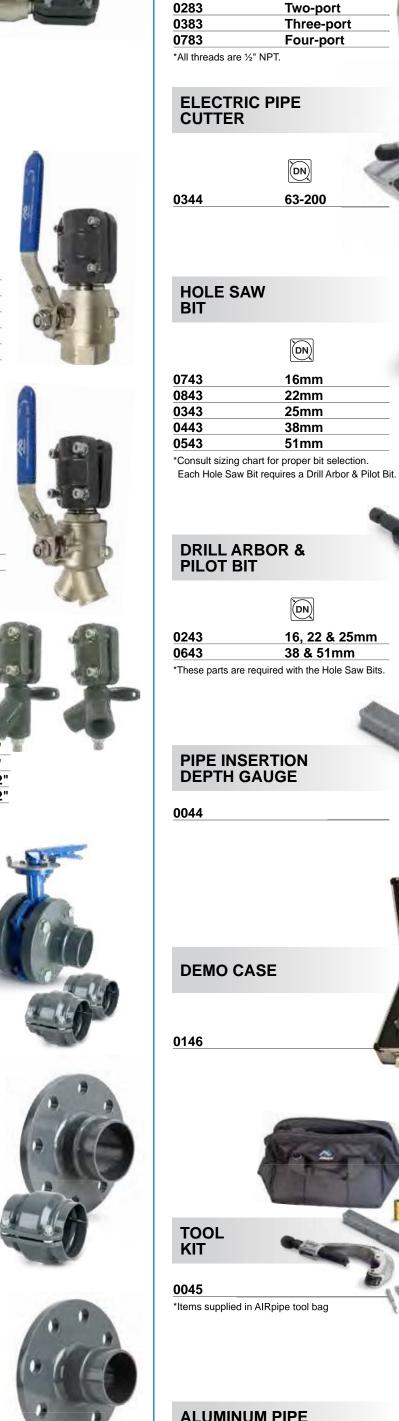

MANIFOLDS

Two-port

Three-port

Four-port

22mm

25mm

38mm

51mm

DN

16, 22 & 25mm

38 & 51mm

SP SP SP SP



PORTABLE

*Comes with all jaw sets.

LUGGING MACHINE

for 63-200

Charge type and hand held

hydraulic machine,

